

Insect-Inspired, Actively Compliant Hexapod Capable of Object Manipulation

W. A. Lewinger¹, M. S. Branicky¹, and R. D. Quinn²

¹Department of Electrical Engineering and Computer Science, Case Western Reserve University, Cleveland, OH, USA, wal4@case.edu, msb11@case.edu

²Department of Mechanical and Aerospace Engineering, Case Western Reserve University, Cleveland, OH, USA, rdq@case.edu

Abstract

Insects, in general, are agile creatures capable of navigating uneven and difficult terrain with ease. The leaf-cutter ants (*Atta*), specifically, are agile, social insects capable of navigating uneven and difficult terrain, manipulating objects in their environment, broadcasting messages to other leaf-cutter ants, performing collective tasks, and operating in cooperative manners with others of their kind [9][12]. These traits are desirable in a mobile robot. However, no robots have been developed that encompass all of these capabilities. As such, this research developed the Biologically-Inspired Legged-Locomotion Ant prototype (BILL-ANT-p) to fill the void. This paper discusses the features, development, and implementation of the BILL-Ant-p robot, quantifies its capabilities for use as a compliant mobile platform that is capable of object manipulation.

Keywords: Biologically-inspired, Actively-compliant, legged hexapod, object manipulation

1 Introduction

The goal of this research [10] was to develop a robot that is power and control autonomous; capable of navigating uneven terrain, manipulating objects within its environment, and active compliance with its environment; very strong for its size; and relatively inexpensive compared to other

similar robots. An investigation into existing hexapod robots [2] was conducted, such as Tarry I and Tarry II [4], MAX [1], Robot I [7] and Robot II [6], the TUM Walking Machine [11], the LAURON series of robots [8], and Genghis [3]. While each robot exhibited one or more of the above-mentioned traits, none were found that encompassed all of the desired aspects. As such, the BILL-Ant-p was designed, constructed, and evaluated.

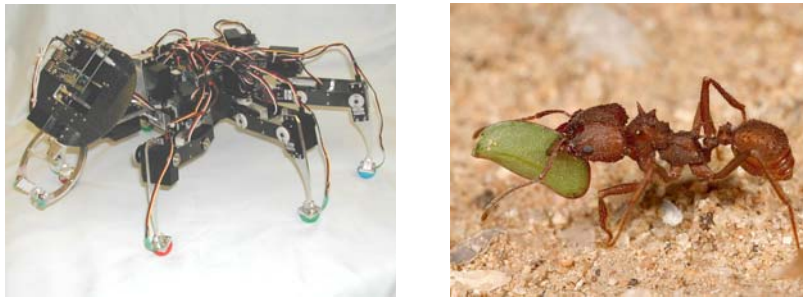


Fig. 1. BILL-Ant-p robot (left) and *Acromyrmex versicolor* (Leafcutter ant found in Arizona, USA, ©Dale Ward) (right)

Based on abstracted anatomy from ants [9][12] and leg coordination from stick insects [5][6][7], the BILL-Ant-p robot (Fig. 1, left) is an actively compliant 18-DOF hexapod robot with six force-sensing feet, a 3-DOF neck and head, and actuated mandibles with force-sensing pincers for a total of 28 degrees of freedom [10]. The robot actively moves in a planar motion away from external perturbations applied to the body by measuring the shift in load on the six foot-mounted force sensors. Similarly, changes sensed by the pincer-mounted force sensors while grasping an object cause actively compliant movements in the neck and the body.

2 Mechanical System

The body is constructed from 6061 aluminum and carbon fiber sheets (Fig.1, left). During a neutral stance, the BILL-Ant-p is 47cm long, 33cm wide, and 16cm and 26cm tall to the top of the body and top of the head, respectively. It weighs 2.85kg.

Layout of the body and orientation of the body-coxa (BC) joints was based as closely as possible on the body segments of various ants (Fig. 2). While the ant body has a much more compact configuration, the mechanical design was limited by the constraints of function (housing batteries and servo controller) and the connecting elements (legs and head/neck). Leg

placement and orientation were designed to accommodate 90 degrees of rotation for each BC joint (maximum range of motion for the joint motors) without interfering with other legs throughout the range of motion. Front and rear BC servos are splayed 60 degrees from the medial plane. The middle BC joint motors are perpendicular to the medial plane. This pattern is similar to the ant for the middle and rear legs; however, it is not biologically accurate for the front legs. While the front BC servo orientations were chosen to produce axially-symmetric body plates, the front legs are attached to their respective servos to roughly conform to the ant's anatomy with a starting position of 15 degrees from the medial plane. All legs have ± 45 degrees of motion; however the front legs have ± 90 degrees of forward/rearward motion from starting positions of 15 degrees off the medial plane.

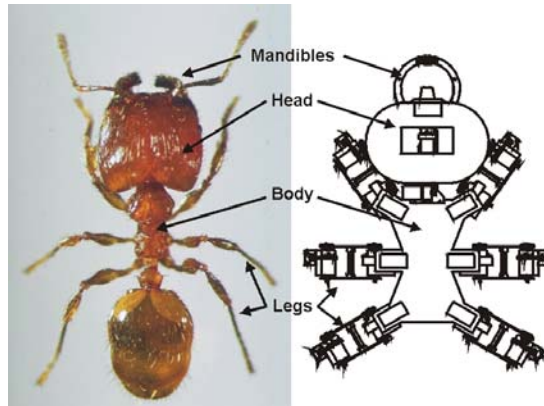


Fig. 2. Top-view body layout comparison of *Pheidole fervida* (left, found in Japan, ©Japanese Ant Database Group) and the BILL-Ant-p robot (right)

Each leg has three active degrees of freedom: a body-coxa (BC) joint, a coxa-femur (CF) joint, and a femur-tibia (FT) joint. MPI MX-450HP hobby motors (Maxx Products, Inc., Lake Zurich, IL, USA) are used for the joints. These servos were chosen for reliability, high torque, and affordability. The MPI servos have 8.37kg-cm of torque, can rotate through a 60° arc in 0.18sec, and the small internal dc motor consumes 1125mW of power at stall torque.

Attached directly to the ends of the tibiae are the feet. The feet provide traction and measure the load along each leg. Each foot is comprised of an Interlink Electronics, Inc. (Camarillo, CA, USA) FSR 402 force-resistive sensor sandwiched between two flat plates, which are 2.06cm square. A

simple voltage divider with a 10k Ω resistor and the force sensor in series is used to measure force at the foot. Signals for each foot are connected to the IsoPod™ microcontroller ADC inputs.

The neck has three degrees-of-freedom, which allows for nimble manipulation of objects. Each degree is actuated by an MPI MX-450HP servo. At the base of the neck is the yaw servo, which is attached to the robot body. The pitch assembly is connected to the output of the yaw servo. The roll servo attaches to an aluminum plate that is connected to the underside of the carbon fiber head. This plate is also connected to the mandibles servo housing to give the mandibles assembly a strong connection to the neck.

The oval-shaped carbon fiber head is 18.54cm wide and 12.19cm long at the extremes. Attached to the neck by the roll servo mounting plate, the head is not part of the load-bearing link between the mandibles and the neck. It supports the two BrainStem microcontrollers that are used to actuate the neck and mandibles. Additional space is available for placement of future sensors, such as a miniature video camera.

Object manipulation is achieved by the twin pincer mandibles (Fig. 1, left). They are fabricated from aluminum and actuated by a single MPI MX-450HP servo. The mandibles are kept open by a lightweight spring and closed by Kevlar fiber cables attached to a pulley on the servo. The tips of the mandibles each hold twin Interlink Electronics FSR 401 force transducers. By using four sensors and having the head at an angle to the ground, mandible closing force and horizontal and vertical forces exerted by a grasped object can be measured.

3 Electrical System

The electrical system has two major components: control and power. Control consists of motor controllers (IsoPod™ and BrainStem microcontrollers) and a System Controller. Power is supplied by on-board Li-ion batteries.

A New Micros, Inc. (Dallas, TX, USA) IsoPod™ V2 SR microcontroller is used to translate System Controller commands into leg joint servo signals and return foot-mounted force sensor values. This microcontroller was chosen for several reasons: programmability, the availability of floating-point math, the ability to control up to 26 R/C servo motors (with the attached daughter board), small footprint, two serial interface ports, and low cost. There are eight ADC inputs on the IsoPod™, six of which are used to measure foot-mounted sensor forces.

Two Acroname BrainStem GP 1.0 microcontrollers (Acroname, Inc., Boulder, CO, USA) are used in the head. These PIC-based controllers have four R/C servo outputs, five 10-bit ADC inputs, five digital I/O ports, an RS-232 serial interface, I²C interface bus, and a digital IR range finder input. One of the BrainStem units controls the 3-DOF neck. Three servo output ports and three ADC input ports are used to actuate and sense the status of the neck servos. The additional two ADC inputs can be used for future expansion. The second BrainStem unit controls the mandibles. The mandible servo is actuated through a servo output port and the four force transducer voltage dividers values are fed into four ADC input ports. Since these controllers have limited processing power and no capacity for floating-point math, they were not selected for use in controlling the legs.

The System Controller is a laptop computer (2.8MHz P4, 1 GB RAM, 60 GB HD) running custom software that was written in Microsoft Visual Basic 6.0 (Microsoft Inc., Redmond, WA, USA). The System Controller has a user interface to dictate commands to the robot and remotely to view robot posture and status. It is connected to both the IsoPod™ microcontroller and the router BrainStem microcontroller by two RS-232 serial ports.

The BILL-Ant-p robot is power autonomous, with four on-board 2400mAh, 7.4vdc Li-ion batteries from Maxx Products, Inc. (MPI, Lake Zurich, IL, USA). To limit the voltage to 6.0vdc, each of the batteries is connected to an MPI ACC134 6-volt Regulator. Three of the batteries are connected in parallel to provide power for the servo motors. The fourth battery supplies power to the microcontrollers.

4 Software System

A Software Interface was created using Microsoft Visual Basic 6.0 (Microsoft Inc., Redmond, WA, USA). The interface allows the operator to command robot actions and view robot status. Basic commands on the interface allow the operator to: manipulate each leg joint; set foot position in body-centric x-, y-, and z- coordinates; initiate a standing routine; adopt a standing posture; adjust body height from the ground; adjust body roll and pitch; drive the robot using speed, heading, and rotation values; manipulate roll, pitch, and yaw of the neck; and adjust position and closing force of the mandibles.

Strafing (moving in one direction while facing another) (Fig. 3, center), walking (a type of strafing where the robot is facing the direction of motion) (Fig. 3, left), rotating (zero radius turn about the body center) (Fig. 3,

right), or a combination of strafing/walking and rotating movements are possible. Each foot heading during stance and swing is calculated based on the heading and rotation values. For strafing/walking all feet move in a uniform direction. Rotating assumes a zero radius turn and has each foot move tangentially to the body center at a speed proportional to the distance from the foot to the body center. Vector sums of each foot's path for strafing/walking and rotating are normalized to the nominal step length to create combinations of movements (e.g. turning in an arc or rotating while moving along a straight line). An implementation of Cruise control for leg coordination is used to adjust stance length and set transition points between stance-swing and swing-stance phases [5][7]. A continuum of gaits from wave to quadruped to alternating tripod is achieved as speed is increased.

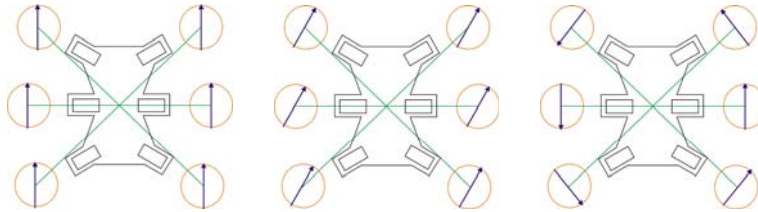


Fig. 3. Foot movements during the swing phase for walking (left), strafing at 330° (center), and rotating counter clockwise (right).

When employing an active compliance behavior, the BILL-Ant-p robot is programmed to maintain a neutral stance, where the legs are axially symmetric about the medial plane, and the neck motors are at the center of their ranges of motion. Perturbations applied to the body are measured by foot-mounted force sensitive resistors. External force magnitude and direction are calculated by summing the force sensor values in body-centric x- and y-coordinates based on the position of each foot relative to the body. Measured forces at each foot are converted to vertical forces (positive z) based on the angle of the foot with respect to the ground. The robot moves in a planar motion in the direction of, and proportional to, the force, as though attached to a virtual attractor by a virtual spring and damper.

The gripping force for the pincers is user-defined and is essentially a stiffness setting. The pincers open and close to maintain the desired gripping force. Similar to the body movements initiated from the foot-mounted sensors, the neck and body respond to forces measured by the pincers. The neck yaw motor moves within its range of motion to balance the forces measured by the pincer sensors such that the sensors values are all equal and at the desired gripping force. The yaw axis is divided into

three 30° areas. When the neck is outside the central 30° area, movement commands are sent to the body to bring the neck toward a more neutral position. Body movements (planar and rotational) are initiated in response to lateral, longitudinal, and rotational forces. These commands continue until the neck is within the “body motion deadband”, near the center of the ranges of motion.

5 System Performance

With fully charged batteries, the robot is able to stand and walk at 0.72cm./sec (two body lengths per minute) with its 2.85kg body weight and an additional 3.18kg of payload, and can rotate at a rate of 6.9°/sec. While standing in a neutral posture, the BILL-Ant-p is able to support its body weight and a payload of up to 8.64kg. Motor batteries allow for approximately 36min of normal operation, or about 25min of heavy lifting. Weight lifting performance declines by up to 30% over 25min as battery power is consumed.

When the body is perturbed, the BILL-Ant-p quantifies the amount and location of the force and moves away from the perturbation at a speed that is proportion to the force. This allows for robot strafing and walking movements to be initiated by pushing or pulling, rather than through the user interface. Speeds up to 0.72cm/sec were observed during several experiments including: pushing from behind, pushing from the side, pushing rearward on the head, pulling toward the head, pulling toward the rear, and pulling toward the side. Since the operator end of the attached string for pulling was raised above the robot body, the robot responded more quickly and smoothly during the pulling experiments. During pushing experiments the feet had a slight tendency to get caught on the ground.

Reactions while grasping an object were conducted by closing the mandibles on a solid block of Delrin® held by an operator. Movements of forward and backward walking, left and right strafing, and clockwise and counter-clockwise rotation were initiated by manipulating the grasped block. As expected, lateral movements and rotational movements of the block caused the neck to rotate in the direction of the applied force. Once the neck was outside the central 30° area, the legs began moving in the appropriate manner for the applied force: strafing for lateral forces and rotating for rotational forces. Forward and backward movements were observed when pulling and pushing the block. The neck rotated to equalize the forces sensed by the pincer contact plates; however the walking response was initiated regardless of the yaw motor position, as programmed.

Acknowledgements

Funding was provided in part by NSF IGERT Training Grant DGE 9972747

References

1. Barnes, D. P., "Hexapodal Robot Locomotion over Uneven Terrain," in Proc. IEEE Conf. on Control Applications. Trieste, Italy, pp. 441 – 445, September 1998.
2. Berns, K., "The Walking Machine Catalog: Walking Machine Catalog," World Wide Web, <http://www.walking-machines.org/>, 2005.
3. Brooks, R. A., "A Robot That Walks; Emergent Behaviors from a Carefully Evolved Network" Technical Report, MIT AI Lab Memo 1091, Cambridge, MA, USA February 1989.
4. Buschmann, A., "Home of Tarry I & II: Design of the Walking Machine Tarry II," World Wide Web, <http://www.tarry.de>, March 2000.
5. Cruse, H., "What Mechanisms Coordinate Leg Movement in Walking Arthropods?" Trends in Neurosciences, Vol. 13, pp. 15 – 21, 1990.
6. Espenschied, K. S., Quinn, R. D., Chiel, H. J., and Beer, R. D., "Biologically Based Distributed Control and Local Reflexes Improve Rough Terrain Locomotion in a Hexapod Robot," Robotics and Autonomous Systems, Vol. 18, pp. 59 – 64, 1996.
7. Espenschied, K. S., Quinn, R. D., Chiel, H. J., and Beer, R. D., "Leg Coordination Mechanisms in Stick Insect Applied to Hexapod Robot Locomotion," Adaptive Behavior, Vol. 1, No. 4, pp. 455 – 468, 1993.
8. Gaßmann, B., Scholl, K.-U., Berns, K., "Behavior Control of LAURON III for Walking in Unstructured Terrain," in Proc. Intl. Conference on Climbing and Walking Robots (CLAWAR '01), pp. 651 – 658, Karlsruhe, Germany, September 2001.
9. Hölldobler, B. and Wilson, E., The Ants, The Belknap Press of Harvard University Press, Cambridge, Massachusetts, 1990.
10. Lewinger, W. A., "Insect-inspired, Actively Compliant Robotic Hexapod," M. S. Thesis, Department of Electrical Engineering and Computer Science, Case Western Reserve University, Cleveland, OH, USA, 2005. (http://biorobots.cwru.edu/publications/Thesis05_Lewinger_BILL-Ant-p.pdf)
11. Pfeiffer, F., Weidemann, H. J., Eltze, J., "The TUM Walking Machine. - In: Intelligent Automation and Soft Computing," Trends in Research, Development and Applications, TSI Press, Vol. 2, pp. 167 – 174, 1994.
12. Yahya, H., The Miracle in the Ant, Ta-Ha Publishers, Inc., London, United Kingdom, 2000.